


Lantech®

FLOOR LOADED CONVEYOR AND PALLET TRUCK RAMP SYSTEM

Get the benefits of conveyORIZED automatics in the Distribution Center environment!

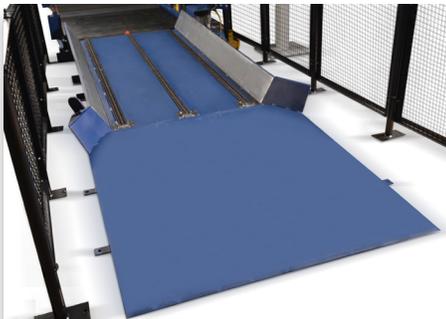

Designed especially for single or dual pallet trucks.



Guide rails help center the pallet on the conveyor.



Get safer-to-ship pallets.

More Lantech field-tested packaging solutions @ www.lantech.com

FLOCPTRS

Rev. 04/24/13

Page 1 of 2

Part# 00000000

FLOOR LOADED CONVEYOR AND PALLET TRUCK RAMP SYSTEM

**Floor Loaded Conveyor & Pallet Truck Ramp
+ SL Automatic = Cutting Edge Automation!**


Ramp Features:

- Dual and single pallet loading.
- Automatic pallet separation.
- Loading by pallet truck or forklift.
- Variable frequency drive control.
- Automatic system start.
- Safety fence and E-Stop included.
- Tapered sides to facilitate proper loading.
- Fully guarded ramp to limit debris accumulation.
- Select the number of conveyors and ramps to maximize flow.

SL Features:

SL Automatic = Safe to Ship!

- Metered Film Delivery
 - 2x wrap force per revolution of film.
 - Pallets wrapped tighter.
- Load Seeking Clamp 4.0
 - Maintains Containment Force at bottom.
 - Eliminates a major source of film breaks.
 - No loose or dragging film tails.
- Pallet Grip
 - Stops loads from sliding off the pallet.
 - Locks load to the pallet with film cable.
- Machine Generated Performance Data
 - Built-in process controls provide detailed wrap and production data.

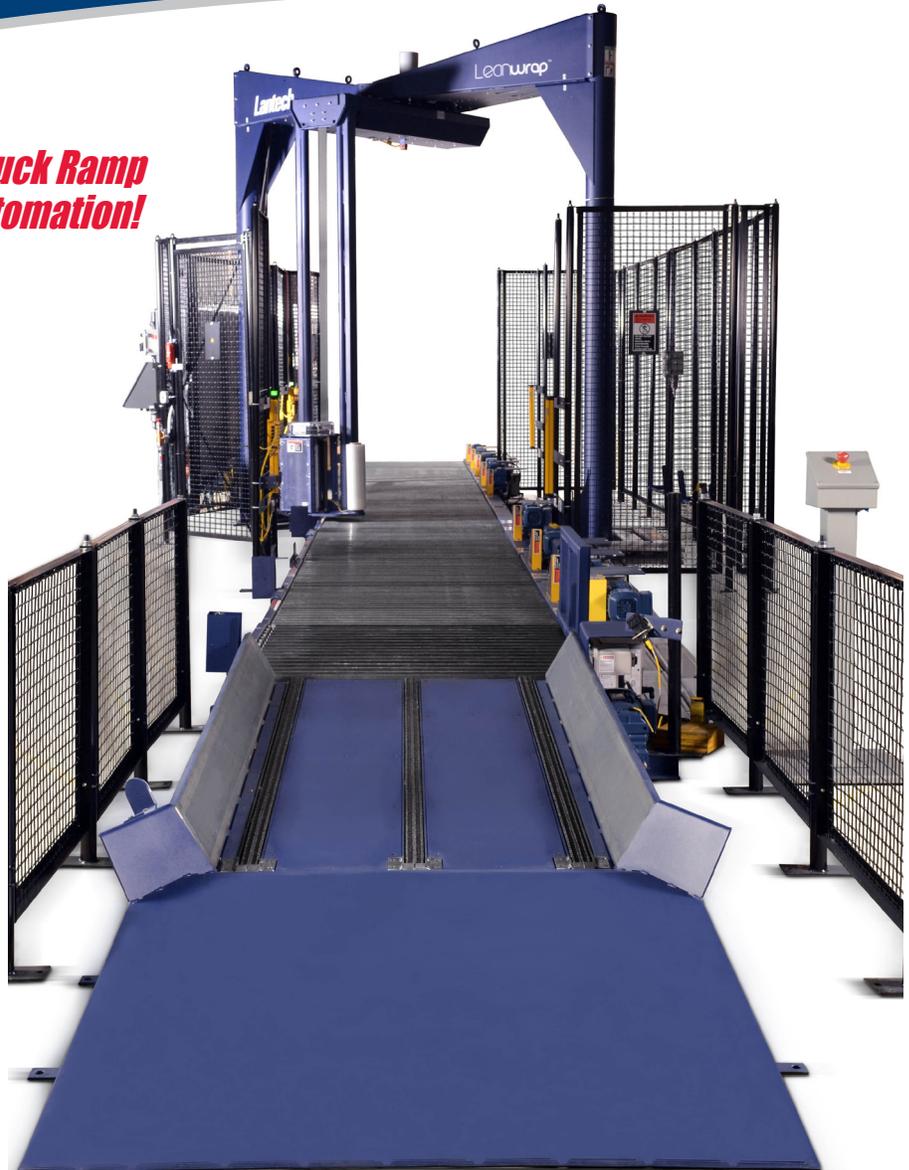

No need for pop ups, lifts, or pits.

Floor Loaded Conveyor and Pallet Truck Ramp System

SPECIFICATIONS

- 40" wide pallet (chains on 36" centers) *Other sizes available*
- Overall Conveyor width 67 - 3/8"
- Wrapzone conveyor 13'
- 3 double strands of #60 roller chain
- 8000 lb pallet load weight capacity on the ramp (2 x 4,000 lb loads)
- 8" pass height
- Steel wearstrips
- Center chain drive

Floor Loaded Conveyor and Pallet Truck Ramp System

LIMITATIONS/NOTES

- System includes SL Automatic with safety gates or light curtains, and a higher weight capacity conveyor after the ramp on the infeed side
- Compatible with overhead straddle machines
- Not compatible with high-speed staging
- Pallet widths MUST all be the same

SERVICE SUPPORT PHONE NUMBER

24 hrs/7 days a week
800-866-0322

Specifications subject to change without notice. Lantech systems and sub-systems are protected by U.S. and foreign patents. Additional U.S. and foreign patents pending. © Lantech

