Lantech

QL-400

Semi-Automatic Stretch Wrapper

We continue to fight for Safe-To-Ship loads with Load Guardian® by simply, easily and repeatably delivering the right containment force for any load configuration.

Combined with Pallet Grip® we lock product to the pallet ensuring your loads ship successfully, arriving at their destination in their as made condition.



Load Guardian is Lantech's patented control system that *creates, maintains* and *delivers* the right containment force for safe-to-ship loads every time. It minimizes operator interaction and eliminates the guess work for stretch wrapping any load configuration.



Ready-To-wrap Profiles

Regular Meavy trans and fits the pollet with no sharp object Applies Moderate Film Tension
Irregular Heavy Heavy and Irregular bad. Applies Moderate Film Tension
Incomplete Top Layer A last foul has a few antis bases on 100. Requires kand-Reping 4 receivables at time furnisate specy
Pre-wrapped Double Load trached lasts have stready been wrapped Applies 3 layers to the existin
Very Short and Inboard Very short last that is estremely lebeard, (Incompatible with XT). Expures Tend Reping 4 record

Ready-To-Wrap profiles allow operators to select the picture that closest matches the load they are trying to wrap and the machine makes all the adjustments.



Wrap Apps



Eliminates the need for operators to make machine adjustments for common load requirements (e.g. stack & band, stack & wrap, labels, cornerboards, top sheet, top box, short loads)




Reports



Report feature allows you to track machine performance. Cycle data, alarms, alarm history, production reports, profile usage and loads per hour. Downloadable and exportable.

Specifications Performance Up to 25-35 loads/hr Peak Production Speed Turntable Speed (Variable) **12 RPM** 1 HP TEFC Turntable Drive **Load Handling** Turntable Size / Diameter 1651 mm (65") Maximum Load Diagonal / Dimensions 1829 mm (72") Maximum Load Height 2032 mm (80") Maximum Load Weight 2268 kg (5000 lbs) Film Delivery System Film Delivery System Power Roller-Stretch PLUS Standard Pre-Stretch 250% E-Z Thread Roll Carriage Standard Variable (Electric) Wrapping Force 254 mm Diameter - 508 mm Length Film Capacity (10" Diameter - 20" Length) Standard Film Width 500 mm (20") Optional 762 mm (30") Width Laser Height Sensor Standard Auto Film Cut-off Standard Pallet Grip® Standard **Service Requirements** 120 Volt 20 Amp-50 Hz Electric N/A Pneumatic NEMA Type 1 Enclosure Standard Standard Wrap Cycle Pause One Way Wrap Standard 24 Hrs/7 Days a week Service Support (800) 866-0322 Phone Number Warranty 5 years, unlimited cycles

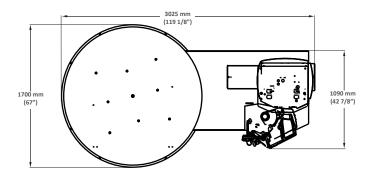



Hundreds of machine improvements based on 25 years of Q machine warranty experience. Wire connections, motors, reducers, and sensors are improved. Plus new controls.

QL-400 Standard Performance Package

Pallet Grip®

Keeps your loads from sliding off pallets during shipment.

Auto Film Cut-off[™]

Saves 30 seconds of operator labor per load.

Power Roller Stretch Plus ™

Maximizes film delivery system performance.

• NEMA Type 1 Enclosure

Protects control system electronics from dust, dirt or moisture.

- 2268 KG (5000 LBS) Weight Capacity and 1 HP Turntable Drive Motor
- No Scheduled Preventative Maintenance.

Options

EZ Weigh® Integrated Scale

Weigh and Wrap in One Easy Step!



Upgrade

UPGRADE to a QL-400XT

Increase Productivity. Keep Your Driver on the Forklift!



Click or Scan to Learn More



Wrap Profiles

