Lantech®

S-300XT

Simple Automation™
Stretch Wrapping System

It's a Lantech!

Work Smarter ... Keep Your Driver on the Forklift!

- *Patented XT Cut and Clamp® Automatically Captures the Stretch Film and Cuts it at the End of the Wrap Cycle.*
- *Save 2 Minutes of Forklift Driver Labor per Load.*
- *No Scheduled Preventative Maintenance.*

3 year warranty




S-300XT

S-300XT

Eliminate the "run-around" with Simple Automation in a fast - paced environment.



S-300XT automatically attaches and cuts the film. Equipped with a fully protected mechanical cut & clamp. Improve productivity by keeping the operator on the forklift.

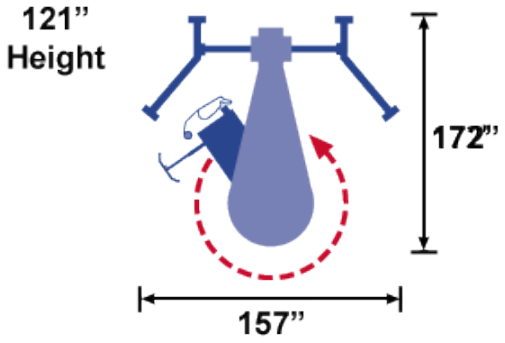

S-300XT Specifications

PERFORMANCE CRITERIA	
■ Production Speed	30-40 loads per hour
■ Maximum Load Diagonal	76"
■ Maximum Load Height	80"
■ Minimum Load Dimensions	30"Wx30"Lx20"H
FILM DELIVERY SYSTEM	
■ Power-Roller Stretch Plus System	200% Standard (100%-300% available)
■ Wrapping Force	Electronically controlled
■ Film Capacity	10" Roll Diameter, 20" Film Web Width
■ E-Z Thread Roll Carriage	Standard
■ Pallet Grip®	Standard
MACHINE SHIPPING WEIGHT	
■ Machine Size	144"Wx157"Lx121"H
■ Shipping Weight	3300 lbs. (including skid - approximate)
ELECTRICAL REQUIREMENTS	
■ Machine Voltage	115V, 20 Amp
■ Microcontroller	Standard
■ UL-Approved NEMA 12/enclosure	Standard
SERVICE SUPPORT	24 hrs/7 days a week

Specifications subject to change without notice. Lantech systems and sub-systems are protected by U.S. and foreign patents. Additional U.S. and foreign patents pending. © Lantech

Boost your machine's performance with these patented features:

Click-n-Go™

Stretch Wrapping Loads at the Touch of a Button!



Enhances portability by eliminating requirement to install a ceiling-mounted lanyard.

Each unit can handle up to 3 machines.

Click-n-Go remote meets the latest safety requirements outlined by the National Electrical Code. Using infrared technology and two-step activation process, the Click-n-Go is immune to accidental activation from stray radio frequency.

Tons of Options Available

30" Film Delivery System
15 RPM Wrap Arm Speed
110" Wrap Height
Base Mount
Cold Package
Extended Warranty
Lexan Plastic Cover
Pre-stretch Gears 100-300%
Seismic Protection Package
Static Collection Brush
Top Sheet Wrap
Two-Speed Roll Carriage and Wrap Arm
Wrap Cycle Pause . . . and more!

MEMBER PMMI USA

Lantech 11000 Bluegrass Pkwy. Louisville, KY 40299-2399 USA 502-815-9109 www.lantech.com