Lantech®

S300XT

Simple Automation
Stretch Wrapping System

It's a Lantech!

Work Smarter ... Keep Your Driver on the Forklift!

- *Pantented XT Cut and Clamp® Automatically Captures the Stretch Film and Cuts it at the End of the Wrap Cycle.*
- *Save 2 Minutes of Forklift Driver Labor per Load.*
- *No Scheduled Preventative Maintenance.*

3 year warranty




More Lantech Field-Tested Packaging Solutions @ www.lantech.com

S300XT

Eliminate the "run-around" with Simple Automation in a fast - paced environment.



S300XT automatically attaches and cuts the film. Equipped with a fully protected mechanical cut & clamp. Improve productivity by keeping the operator on the forklift.

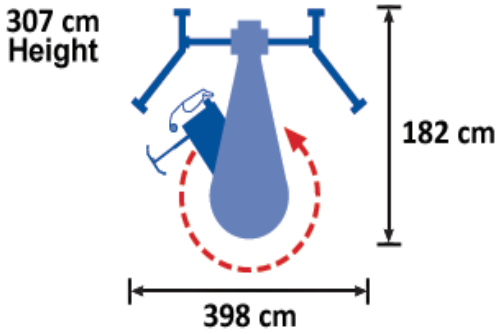

S300XT Specifications

PERFORMANCE CRITERIA	
■ Production Speed	30-40 loads per hour
■ Maximum Load Diagonal	193 cm
■ Maximum Load Height	203 cm
■ Minimum Load Dimensions	762mm W x 762mm L x 508mm H
FILM DELIVERY SYSTEM	
■ Power-Roller Stretch Plus System	200% Standard (100%-300% available) Electronically controlled
■ Wrapping Force	
■ Film Capacity	25.4cm Roll Diameter, 50.8cm Film Web
■ E-Z Thread Roll Carriage	Standard
■ Pallet Grip®	Standard
MACHINE SHIPPING WEIGHT	
■ Machine Size	365cm W x 398cm L x 307cm H
■ Shipping Weight	1496 kg (including skid - approximate)
ELECTRICAL REQUIREMENTS	
■ Machine Voltage	115V, 20 Amp
■ Microcontroller	Standard
■ UL-Approved NEMA 12/enclosure	Standard
SERVICE SUPPORT	24 hrs/7 days a week

Specifications subject to change without notice. Lantech systems and sub-systems are protected by U.S. and foreign patents. Additional U.S. and foreign patents pending. © Lantech

Boost your machine's performance with these patented features:

Click-n-Go®

Stretch Wrapping Loads at the Touch of a Button!



Enhances portability by eliminating requirement to install a ceiling-mounted lanyard.

Each unit can handle up to 3 machines.

Click-n-Go remote meets the latest safety requirements outlined by the National Electrical Code. Using infrared technology and two-step activation process, the Click-n-Go is immune to accidental activation from stray radio frequency.

Tons of Options Available

76 cm Film Delivery System
15 RPM Wrap Arm Speed
279 cm Wrap Height
Base Mount
Cold Package
Extended Warranty
Lexan Plastic Cover
Pre-stretch Gears 100-300%
Seismic Protection Package
Static Collection Brush
Top Sheet Wrap
Two-Speed Roll Carriage and Wrap Arm
Wrap Cycle Pause . . . and more!

Lantech 11000 Bluegrass Pkwy. Louisville, KY 40299-2399 USA 502-815-9109 www.lantech.com