

## SL400 with Load Guardian® technology removes the operator guesswork required to wrap a safe-to-ship load at the lowest cost.

### Simple Warehouse Solution

Ideal for very light, very heavy, or very unstable loads

- Load doesn't rotate
- No weight limitations
- No conveyors or ramps required

### Uncompromised safety


- Large yellow safety shield protects any objects or personnel that may accidentally enter the wrap zone during a cycle. The shield absorbs the impact and stops the machine.
- A loud alarm alerts personnel that the wrap cycle is about to start; and safety beacon flashes during entire wrap cycle.
- Generous 14" clearance between support column and wrap arm; and the control panel is mounted at the rear, away from the wrap zone.

### Committed to ensuring machines stay running

- 3-year warranty – no exclusions, unlimited cycles, no exceptions
- No scheduled preventative maintenance
- Regionally-based, global technical and customer support
- Most parts ship same day



### Load Guardian®



**Creates, Maintains, Delivers the right containment force for safe-to-ship loads**

- Simple, intuitive controls
- Eliminates operator guesswork
- Reduces load damage

### Pallet Grip®



**Lock your load to the pallet**

- Stops loads from sliding off pallets during transit
- Reduces returned goods and transit damage
- Lowers costs and carbon footprint

### Auto Film Cut Off



**Keep loads and productivity moving**

- Cuts film automatically at the end of the wrap cycle
- Operators don't have to cut film themselves
- Saves at least 30 seconds of labor

### Power Roller Stretch Plus



**Responds faster and more accurately**

- Better corner compensation
- Minimizes corner and product crushing
- 225% pre-stretch standard

Standard Specifications - options available	
SPEC ITEM	GLOBAL SPECS
<b>PERFORMANCE</b>	
Production Speed	1-40 LPH
Maximum Load Size	1372 mm L x 1372 mm W x 2032 mm H 54" L x 54" W x 80" H
Minimum Load Size	762 mm L x 762 mm W x 508 mm H 30" L x 30" W x 20" H
Maximum Load Weight	Floor Capacity
<b>LOAD HANDLING AND FILM DELIVERY SYSTEM</b>	
Rotation Speed	1-15 RPM
Pre-stretch	225%
Film Capacity	508 mm Web with 254 mm Diameter 20" Web with 10" Diameter
Film Cut and Clamp	Auto Film Cutoff
Film Delivery System	Power Roller Stretch Plus
Load Guardian®	Standard
Pallet Grip®	Standard
TurboTak®	Optional
<b>ELECTRICAL</b>	
Power	240VAC/20A/1-Phase/60Hz
Control	178mm (7") Touchscreen Computer
Motor Control	VFD/AC Motor
Wiring	Cables for easy assembly
<b>PNEUMATIC</b>	
Pneumatic Data	Not Applicable
<b>SAFETY</b>	
Safe Torque Off (STO)	Standard
Performance Level	In accordance with ISO 13849-1 Standard
<b>SERVICE SUPPORT</b>	
Warranty	3 Year Unlimited Cycle Coverage
24/7 Technical Support	US 1 (800) 866-0322

## DID YOU KNOW?

After pallets leave your warehouse they may become part of an automated system you aren't aware of. As cross-dock facilities become autonomous, film tails become a huge issue.

## Boost your machine's performance: TurboTak®



### Eliminate Film Tails

- Film tails put loads at risk when they cause the film to begin unraveling before the load even leaves the building.
- TurboTak's patented design provides two stages of precise, high-velocity blasts of air to eliminate film tails. The first blast shapes the film web in the precise location; the second, more focused blast, "nails" the film tail to the underlying layers of film.



## Increase Productivity Even More. Upgrade to an SL400LT

- Work Smarter . . . Keep your driver on the fork truck!
- Patented Load Seeking Clamp® automatically captures the stretch film and cuts it at the end of the wrap cycle.
- TurboTak eliminates film tails.
- Save two minutes of fork truck driver labor per load.

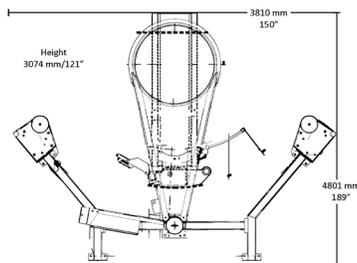

Click or Scan to Learn More



SL400 Product Video



TurboTak® Video



Lantech.com